


# Data Sheet RESIN SUPRA

## RESIN RIBBON FOR FLAT HEAD PRINTER

AS HARZ SUPRA ribbons provide the highest levels of resistance to abrasion, heat (300°C on polyamide film). Prints exceptionally on high end films including polyester, vinyl and polyamide.

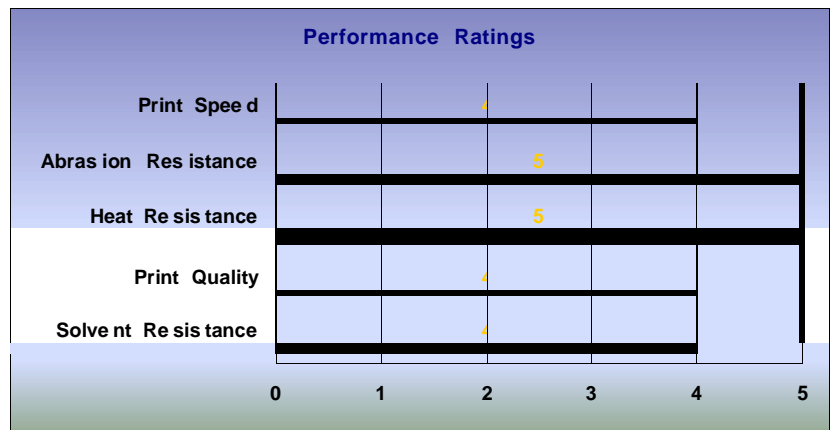

### Technical Specifications

Type:	Resin
Base Film:	Polyester
Base Film Thickness :	4,5 µ
Colour:	Black
Ribbon Transmission Density:	> 1.0

### Printing Properties

Print Speed:	150 mm/s
Ink Melt Point:	110°C
Print Density:	NA
Abrasion Resistance :	ANSI more than A
Solvent Resistance	ANSI more than A

### Usage Condition

ca. 5 - ca. 35°C, 30 - 80 % Relative Humidity

### Storage Condition

ca. 5 - ca. 35°C, 30 - 80 % Relative Humidity

### Recommended Media

coated paper, PE, PET, etc.

### certificate

ISEGA certific ate, UL approved

All information on this data sheet are the best currently available. The values may vary slightly when tested in a different environment. The results should, however, only be regarded as general guide to material properties and not as a guarantee. Subject to change without notice.