

U2

150Mbps High Gain Wireless USB Adapter

U2 is a Plug-and-Play 150Mbps USB network adapter. It is automatically installed as soon as being connected to a computer, which relieves you from the troublesome installation procedure. The external 6dBi high-gain omni-directional antenna ensures a further transmission range. It is applicable to devices running Windows XP, Windows 7, Windows 8, Windows 8.1, or Windows 10.



Configuration free

Powered by a chip supporting Plug-and-Play, it is automatically installed as soon as being connected without a driver from a CD-ROM or the internet, enabling you to set up a wireless internet connection more easily.




6dBi high-gain antenna for better signal reception

6dBi high-gain antenna sets a record high in signal transmission and reception distances, ensuring broader coverage and more stable signals.



The military-class high-precision RF materials offer consistent video and gaming experience

Nissan high-precision RF materials and numerous times of RF link and antenna tuning help strike a perfect balance between signal quality and transmit power. Additionally, the omni-directional antenna rotatable in 180° allows you to point it at any angle for more stable signals and faster video playback and gaming.

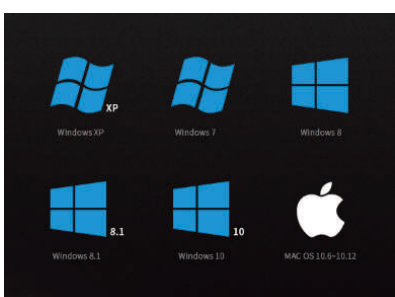

Compatible with various types of OS

It is applicable to devices running Windows XP, Windows 7, Windows 8, Windows 8.1, or Windows 10.s.

Product Specification

| HARDWARE FEATURES | |
|----------------------|--|
| Interface | USB2.0 |
| Dimensions (W! D xH) | 48mm*20mm*8mm(L x W x H) |
| Antenna Type | 1* 6dBi external antenna |
| WIRELESS FEATURES | |
| Wireless Standards | IEEE 802.11b, IEEE 802.11g, IEEE 802.11n |
| Frequency | 2.400~2.4835GHz |
| Signal Rate | 11b: Up to 11Mbps(dynamic) 11g: Up to 54Mbps(dynamic) 11n: Up to 150Mbps(dynamic) |
| Transmit Power | <20dBm (EIRP) |
| Wireless Modes | Station Mode |
| Wireless Security | 64/128-bit WEP,WPA-PSK / WPA2-PSK,WPA / WPA2 |
| Channel | 1~13 |
| OTHERS | |
| Package Contents | Wireless Adapter U2,QIG |
| System Requirements | windows10 (32/64bits),Windows 8.1(32/64bits), Windows 8(32/64bits), Windows 7(32/64bits),Windows XP(32/64bits) |
| Environment | Operating Temperature: 0°C~40°C (32°F~104°F) |
| | Storage Temperature: -40°C~70°C (-40°F~158°F) |
| | Operating Humidity: 10%~90% non-condensing |
| | Storage Humidity: 5%~90% non-condensing |
| Certification | CE/RoHS/FCC |
| Related Products | F3、FH456、A9 |

SHENZHEN TENDA TECHNOLOGY CO.,LTD.

Tenda Technology Bldg.Int'l E-City,
#1001 Zhong Shan Yuan Rd.,Nanshan District,Shenzhen China.

Tel:+86-755-2765 7098
Fax:+86-755-2765 7178
PC:518055

! "#\$%&'()*+,-./:;<=>?@A B C D E F G H I J K L M N O P Q R S T U V W X Y Z [\] ^ _ ` a b c d e f g h i j k l m n o p q r s t u v w x y z { | } ~ ¡ ¢ £ ¤ ¥ ¦ § ¨ © ª « ¬ ® ¯ ° ± ² ³ ´ µ ¶ · ¸ ¹ º » ¼ ½ ¾ ¿ À Á Â Ã Ä Å Æ Ç È É Ê Ë Ì Í Î Ï Ñ Ò Ó Ô Õ Ö × Ø Ù Ú Û Ü Ý Þ ß à á â ã ä å æ ç è é ê ë ì í î ï ð ñ ò ó ô õ ö ÷ ø ù ú û ü ý þ ÿ